










ASSEMBLY INSTRUCTIONS

EXTRA LARGE DOUBLE SLIDING DOOR

Please read these instructions in conjunction with your standard shed instructions.

COMPONENTS CHECKLIST

Please check the parts carefully and advise immediately if any are damaged or missing.

A 1 x shed front assembly 	B 2 x door 	C 1 x top track 	D 1 x bottom track 
E 4 x 100mm bottom door rails 	F 4 x wheel kit 	G 1 x hasp latch kit 	H 4 x door stop kit 

STEP ONE: FRONT WALL

1. To the shed front assembly **A** slide the top track **C** down over the top channel of the front assembly. Place the bottom track **D** so the long edge sits against the bottom channel of the front assembly and flush with the bottom.
2. Top track: Align with the edge of the top shed channel. Rivet into place with four rivets, into the top channel.
3. Bottom track: Rivet into place with six rivets evenly spaced.

YOU WILL NEED:

A 1 x shed front assembly

C 1 x top track

D 1 x bottom track

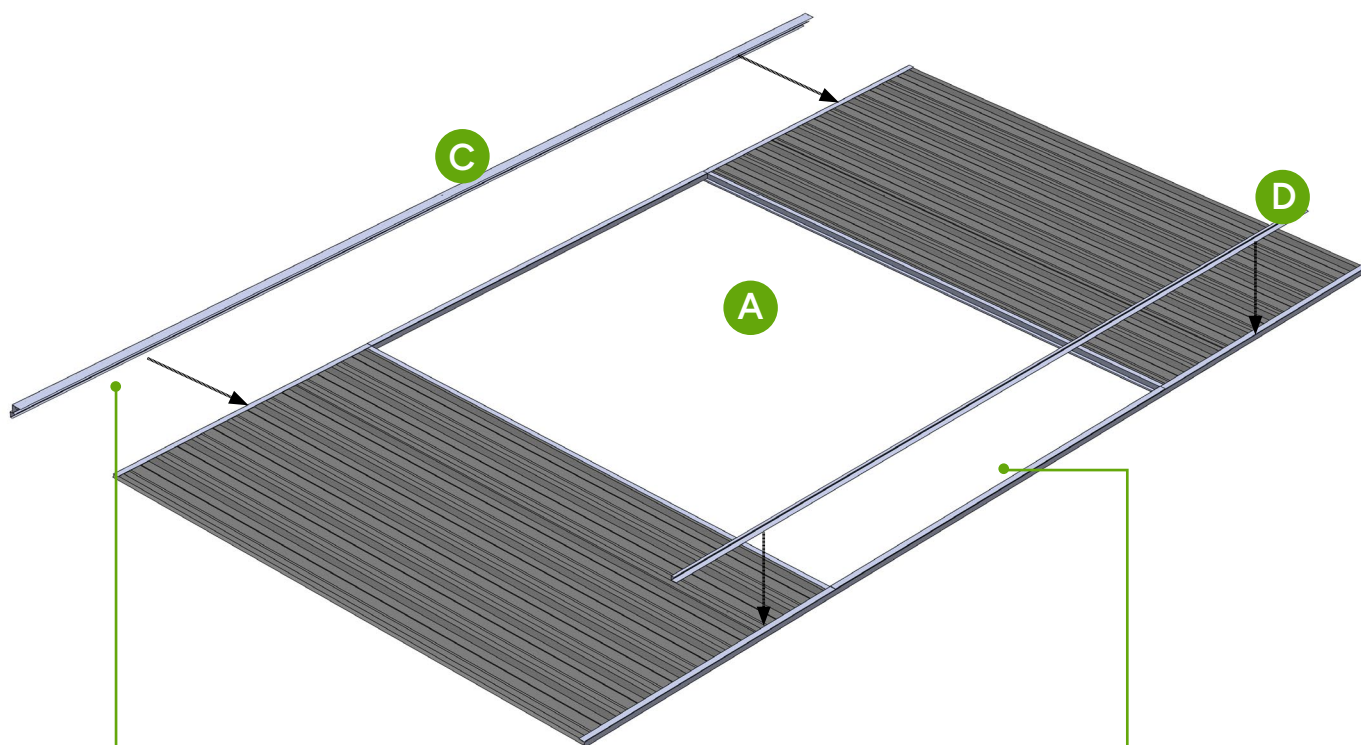


DIAGRAM 1

Fix with four rivets to the inside of the top channel and into the wall sheets.

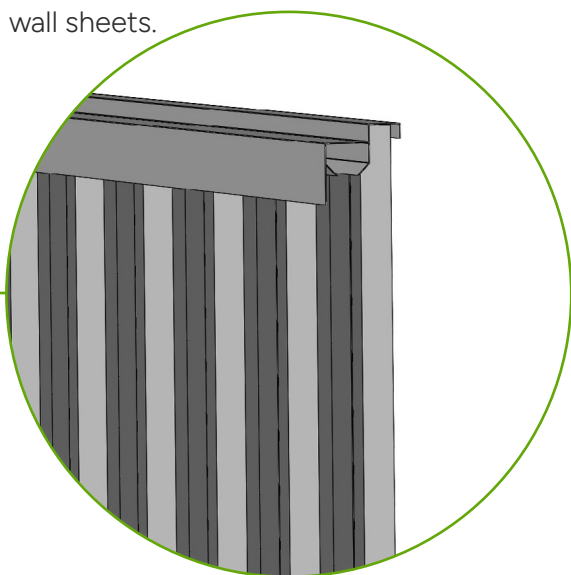


DIAGRAM 2

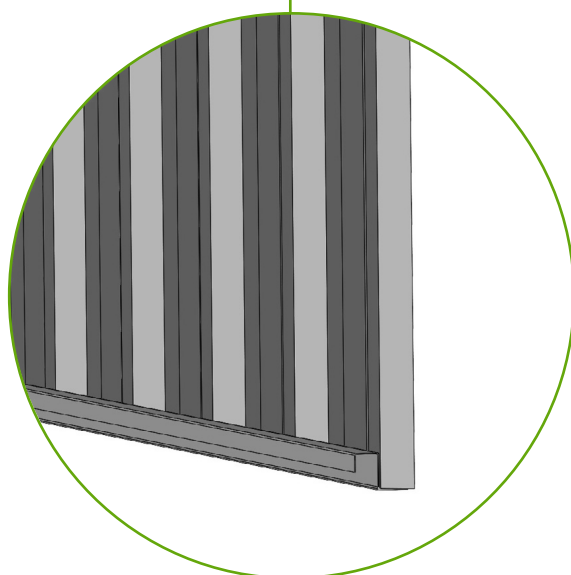


DIAGRAM 3

STEP TWO: FITTING WHEELS

1. Drill a 7mm hole at each end of the top channel of the **B** doors on the 2nd rib approximately 170mm in from the side (see diagram 3).
2. Attach a wheel **F** to each end of the door by first inserting the cap screw up underneath through the hole. Next place the spring washer onto the cap screw then use the nut to tighten. (see diagram 4).
3. Rotate the wheel clockwise or anti-clockwise to raise or lower the door to the required height.

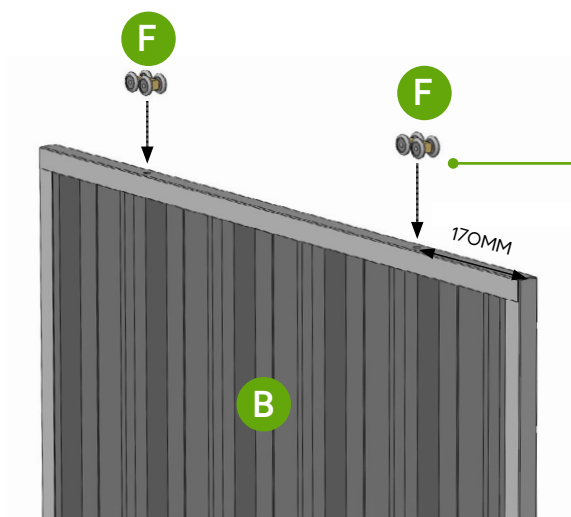


DIAGRAM 4

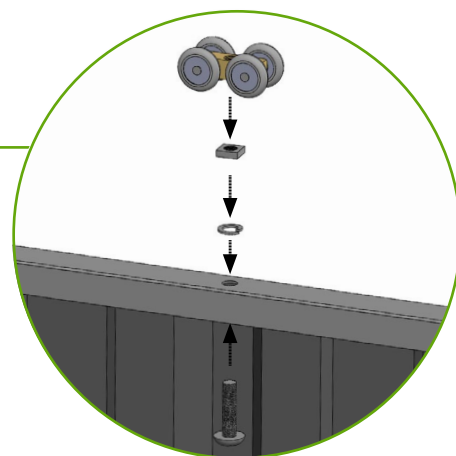


DIAGRAM 5

YOU WILL NEED:

B 2 x door

F 4 x wheel kit

STEP TWO: FITTING WHEELS

1. Attach the two bottom door rails **E** to the bottom of the back of the door **B** through the bottom door channel. Rivet to the channel. (see diagram 7).

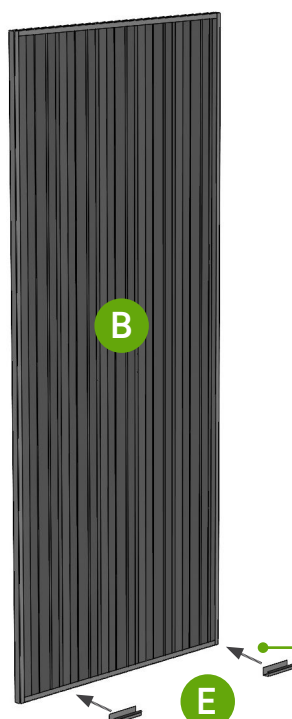


DIAGRAM 6

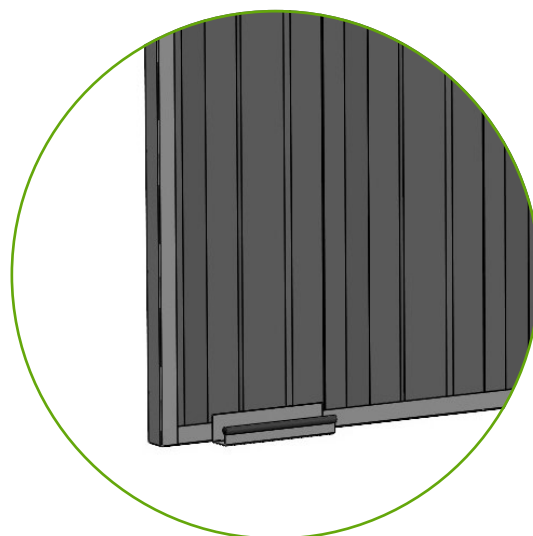


DIAGRAM 7

YOU WILL NEED:

B 2 x door

E 4 x 100mm
bottom door rails

STEP FOUR: FIT DOOR

1. Pick up the door **B** (you may need a set of helping hands here). Slide the wheels on the top of the door into the channel on the top rail (see diagram 8).
2. Ensure that the bottom door rails **E** are sitting under the bottom track **D** (see diagram 9).




DIAGRAM 8

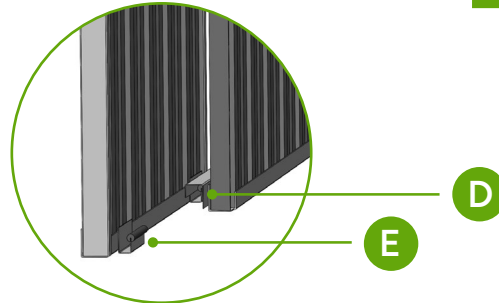


DIAGRAM 9

YOU WILL NEED:

B 2 x door

QUICK TIP!

You may need to remove the door and adjust the wheels to ensure that the fit is as tight as possible. This will reduce rattling in high wind.

STEP FIVE: FIT LATCH

1. Place the left side of the latch **G** onto the left door **B** and mark the mounting point onto the door. Repeat for the right door and latch.
2. Ensure both latch pieces **G** are aligned. Drill the marked points and rivet the latch pieces to the door (see diagram 10).

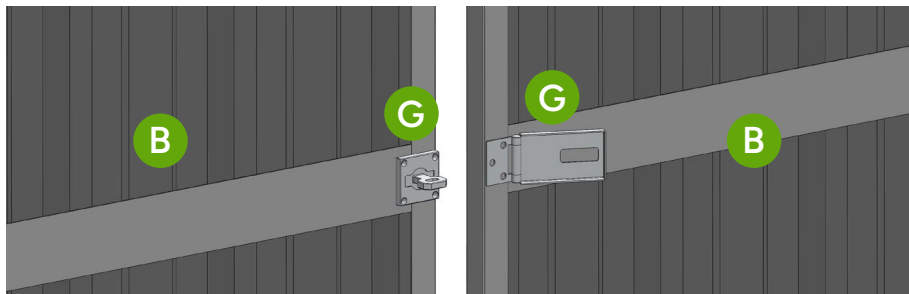


DIAGRAM 10

YOU WILL NEED:

B 2 x door

G 1 x hasp latch kit

STEP TWO: FIT DOOR STOPS

1. Tighten the door stops screw until there is just enough of a gap to slide into the top track (see diagram 13). Position the door stops where you would like your door to stop when open, (see diagram 12). tighten the screw so it is firm in place.

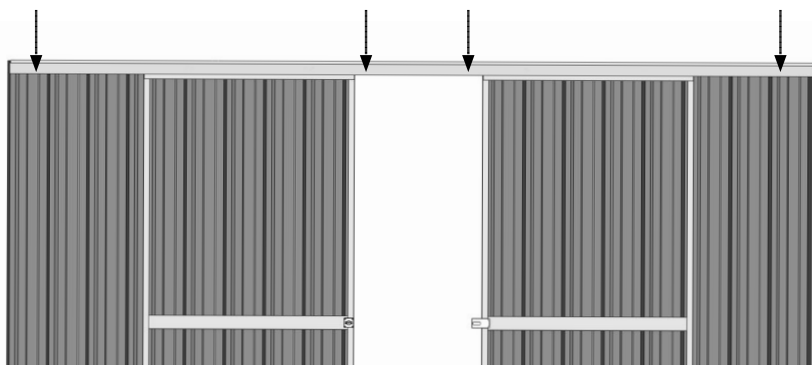


DIAGRAM 11




DIAGRAM 12

YOU WILL NEED:

C 1 x top track

H 4 x door stop kit

That's it! Your sliding door is now complete